## Erratum



## Erratum to: On the selection of Ti–Cu alloys for thixoforming processes: phase diagram and microstructural evaluation

Kaio Niitsu Campo<sup>1</sup>, Dalton Daniel de Lima<sup>1</sup>, Éder Sócrates Najar Lopes<sup>1</sup>, and Rubens Caram<sup>1,\*</sup>

<sup>1</sup> School of Mechanical Engineering, University of Campinas, Rua Mendeleiev, 200, Campinas, SP 13083-860, Brazil

Published online: 1 August 2016

© Springer Science+Business Media New York 2016

## Erratum to: J Mater Sci (2015) 50:8007–8017 DOI 10.1007/ s10853-015-9367-4

The authors regret that some minor errors were found in our paper. However, it is important to note that they did not affect the contributions and conclusions of the investigation.


The values in the scale bars shown in Fig. 5b and d in the original article are incorrect; the reader should

read 1.5 and 3 mW/mg, respectively. On page 8012, column 2, paragraph 4, the word *solidus* is misused twice; the reader should read *liquidus* instead. On page 8016, column 1, paragraph 1, the word *eutectoid* is unfortunately misused; the reader should read *eutectic* instead.

We would like to apologize for any inconvenience caused.

The online version of the original article can be found under doi:10.1007/s10853-015-9367-4.

Address correspondence to E-mail: caram@fem.unicamp.br

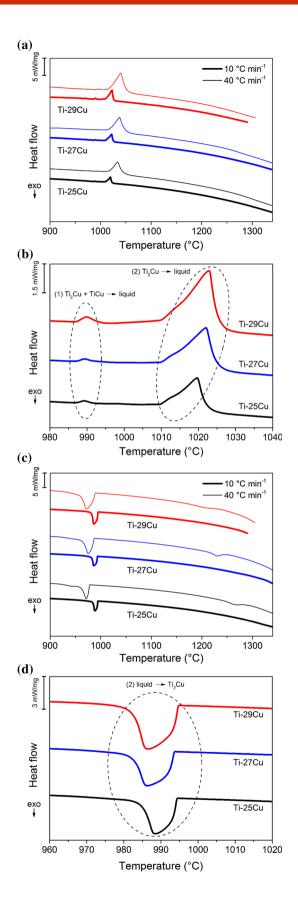

◄ Fig. 5 Heat flow *versus* temperature curves of the Ti–25Cu, Ti– 27Cu, and Ti–29Cu alloys at scan rates of 10 and 40 °C min<sup>-1</sup> during **a** heating (melting), **b** a magnification of '(**a**)' (considering only the 10 °C min<sup>-1</sup> rate), **c** cooling (solidification) and **d** a magnification of '(**c**)' (also considering only the 10 °C min<sup>-1</sup> rate) (Color figure online).