



Correction to: Synthesis and Performance Evaluation of Unsaturated Polyester Blends of Resins and Its Application on Non-woven/Fabric Jute Fibers Reinforced Composites

Nilakshi Kakati^{1,2} · Edja F. Assanvo^{1,3} · Dipul Kalita^{1,2}

Published online: 12 September 2019
© Springer Science+Business Media, LLC, part of Springer Nature 2019

Correction to: Journal of Polymers and the Environment
<https://doi.org/10.1007/s10924-019-01537-5>

The original version of this article unfortunately contained mistakes in the placement of Figs. 5, 7–10 and their captions. The corrected Figs. 5, 7, 8, 9 and 10 with captions have been given below:

The original article has been corrected.

The original article can be found online at <https://doi.org/10.1007/s10924-019-01537-5>.

✉ Nilakshi Kakati
nkakati101@gmail.com

Edja F. Assanvo
assanvo_edja@yahoo.fr

Dipul Kalita
dipulkita@gmail.com

- ¹ Academy of Scientific and Innovative Research (AcSIR), CSIR-North East Institute of Science and Technology, Jorhat, Assam 785006, India
- ² Cellulose Pulp & Paper Group, Material Sciences & Technology Division, CSIR-North East Institute of Science and Technology, Jorhat, Assam 785006, India
- ³ Laboratoire de Thermodynamique et de Physico-Chimie du Milieu, UFR-SFA, Université Nangui, Abrogoua, 02, BP 801, Abidjan 02, Côte d'Ivoire

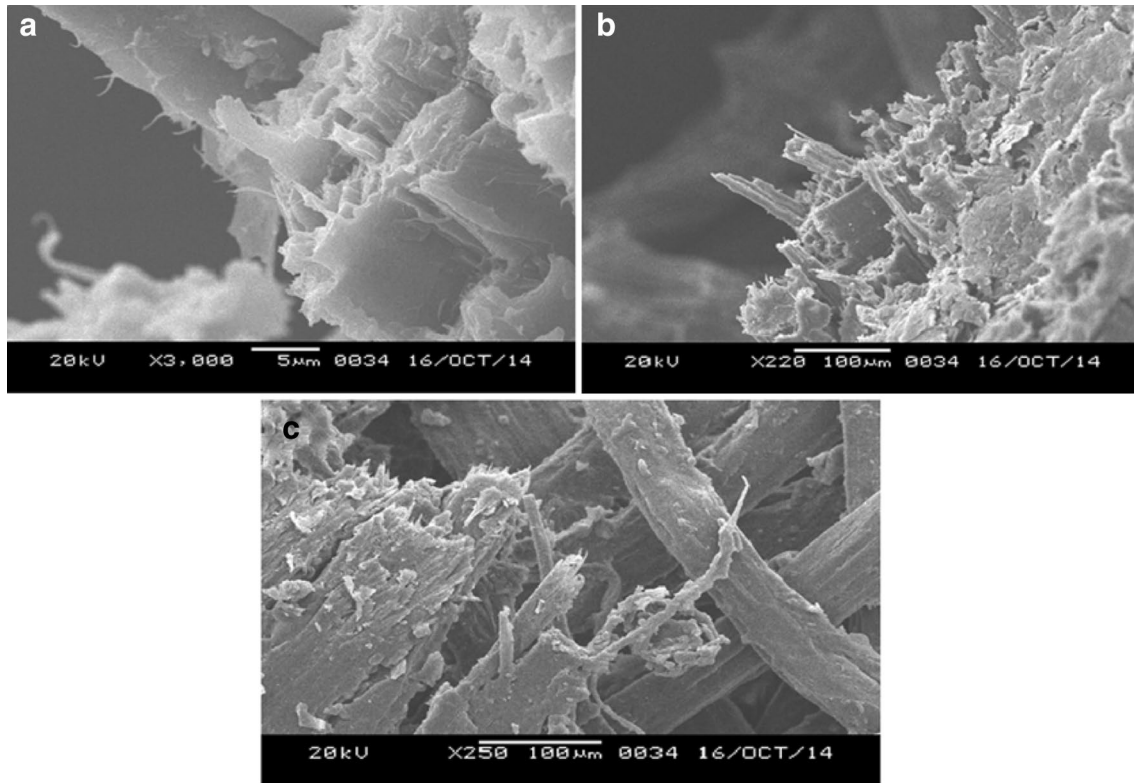


Fig. 5 Fracture surface of a UPC10, b UPC5, and c UPC0

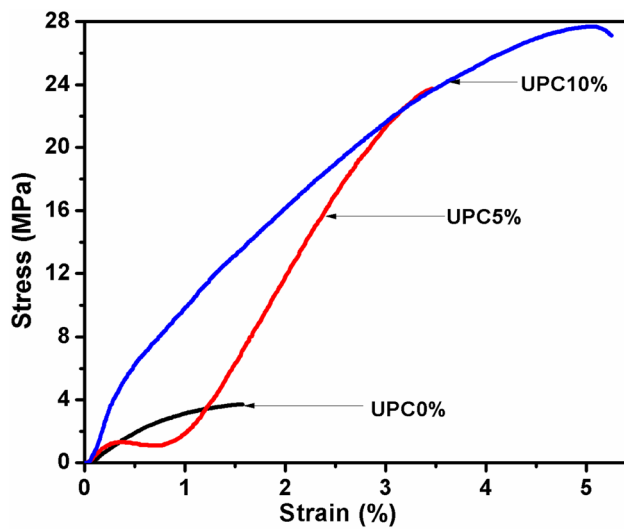


Fig. 7 Stress–strain curves

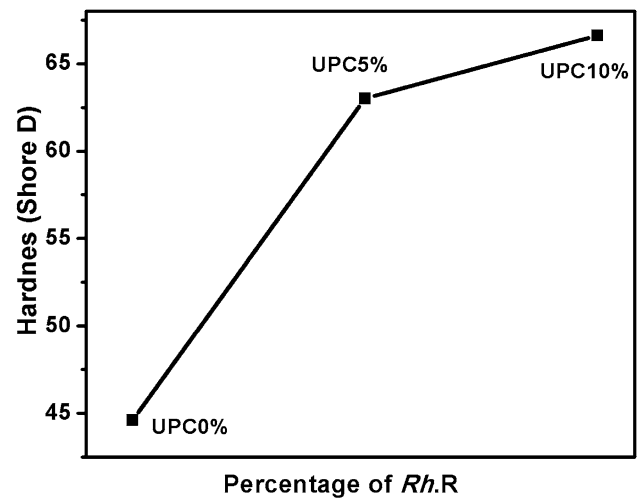


Fig. 8 Relationship between hardness shore D versus alkyd resin content in UP blend

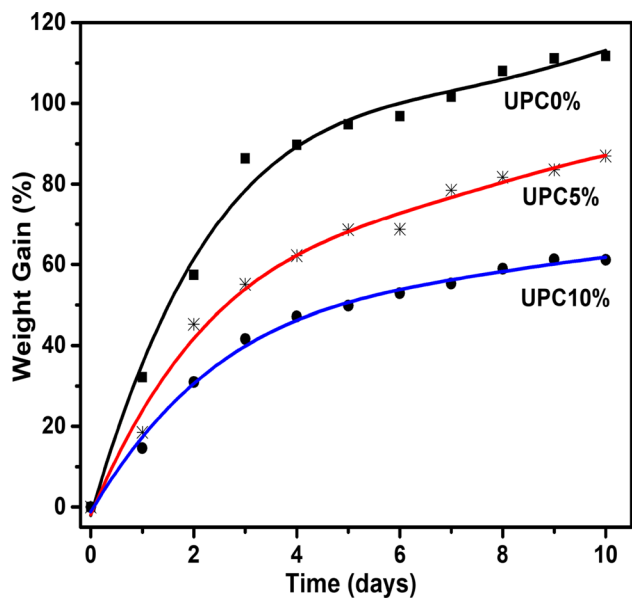


Fig. 9 Water absorption of UPC0, UPC5, and UPC10

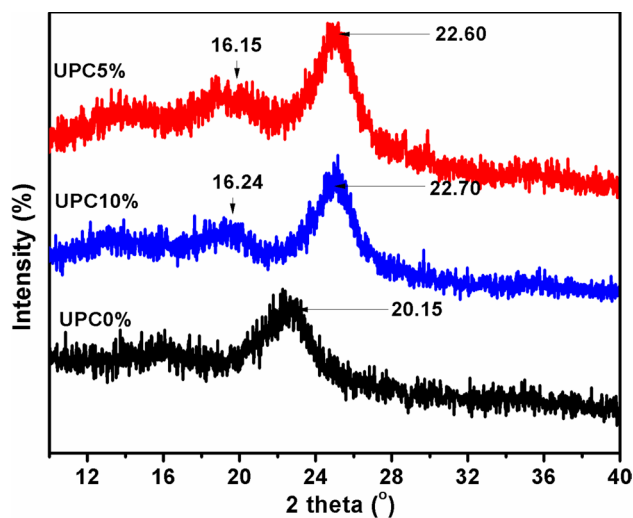


Fig. 10 XRD diffractograms of non-woven/fabric jute composites UPC0, UPC5 and UPC10

Publisher’s Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.