

CORRECTION TO: EFFECTS OF PROCESS RELATED VARIATIONS ON FILLABILITY SIMULATION OF THIN-WALLED IN718 STRUCTURES

Mohsin Raza 

School of Innovation, Design and Engineering, Mälardalen University, Eskilstuna, Sweden
TPC Components AB, Hallstahammar, Sweden

Roger Svenningsson

Swerea SWECAST AB, Jönköping, Sweden

Mark Irwin

TPC Components AB, Hallstahammar, Sweden

Björn Fagerström

School of Innovation, Design and Engineering, Mälardalen University, Eskilstuna, Sweden

Anders E. W. Jarfors

Materials and Manufacturing, School of Engineering, Jönköping University, Jönköping, Sweden

Copyright © 2018 American Foundry Society
<https://doi.org/10.1007/s40962-018-0223-6>


Correction to:
International Journal of Metalcasting
<https://doi.org/10.1007/s40962-017-0189-9>

The following are errors in the original article. All are corrected as reflected here:

The spelling of fillability is incorrect.

Björn Fagerström's family name is misspelled.

In Fig. 2c, the density of IN718 should have been stated in kg/cm^3 . Following is the corrected figure:

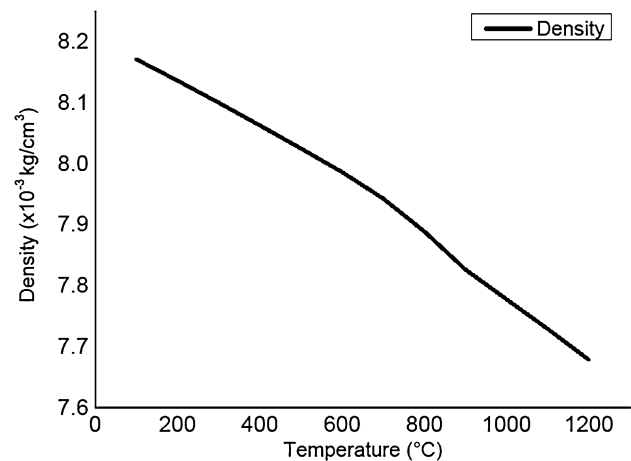

The original article can be found online at <https://doi.org/10.1007/s40962-017-0189-9>.